

REV.	Description	REV.	Description
01	(3~4,H) DEL DIM: 2.0, 22.0 WAS 24.0, 5.7 WAS 5.0 (1,C&7,C) EXTRUDED HOLE WAS TAPPING 12/24/2007		
02	UPDATE CABLE SPEC UPDATE LABEL LOCATION 05/15/2009		
03	(C,4) ADD DELTA BARCORE 06/05/2009		

DELTA DOC CENTER






台達電子工業股份有限公司
DELTA ELECTRONICS, INC.

Description:
PHYSICAL DIMENSIONS OF POWER SUPPLY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

Part No.	DPS-250AB-24 C	REV.	
USED ON	DPS-250AB-24 C		03
SHEET	2 OF 2		

△ DC OUTPUT CABLE

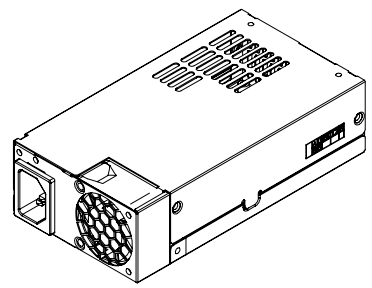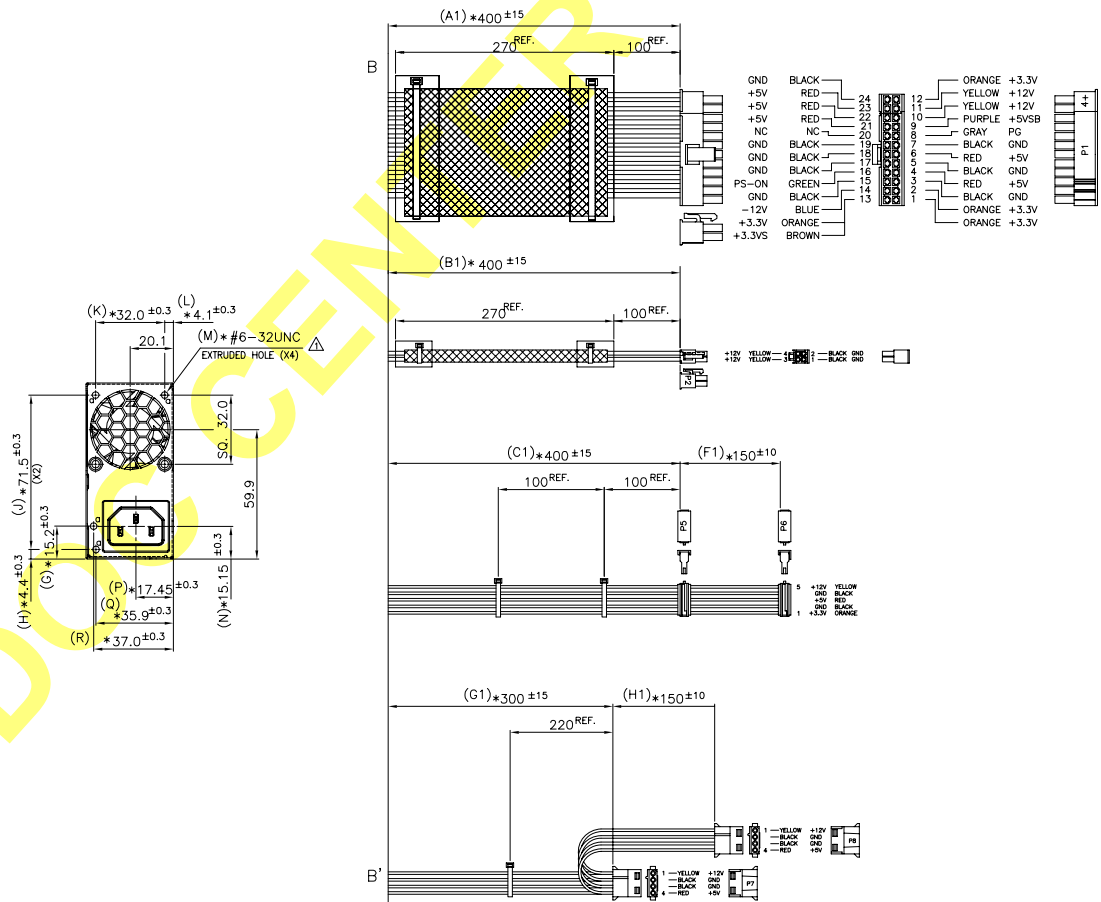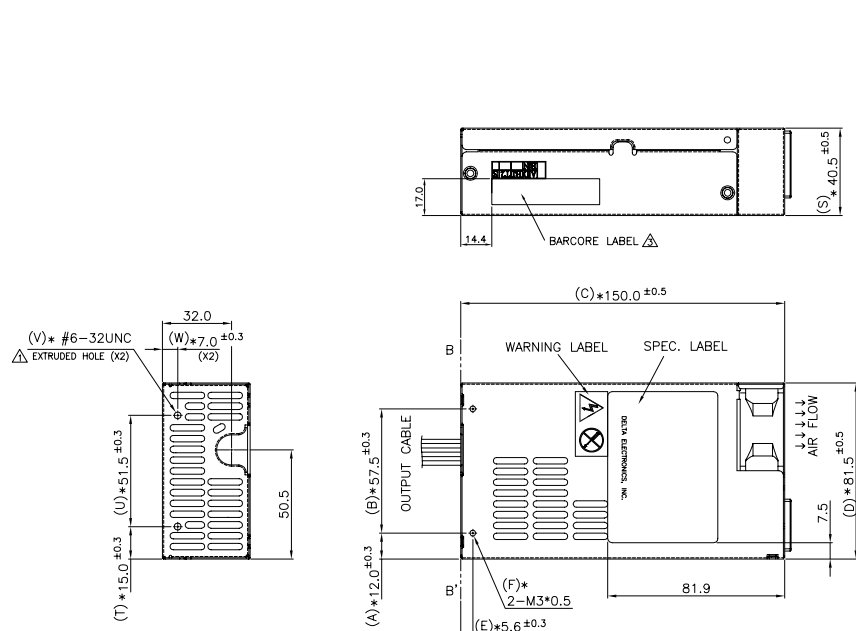

* IS CRITICAL DIM WHICH MUST BE MEASURED

合達電子工業股份有限公司 DELTA ELECTRONICS, INC.	Drawn: 高銀錦 10/29/07 Design: 曾吉生 10/29/07
	Description: PHYSICAL DIMENSIONS OF POWER SUPPLY
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUS OR DEVICES WITHOUT PERMISSION.	Part No. DPS-250AB-24 C SHEET 1 OF 2 ISSUE DATE: 10/29/07
DIMENSIONAL TOLERANCES (mm): ≤ 30 : ±0.25 >30-100 : ±0.35 >100-300 : ±0.5 ABOVE 300 : ±0.8 DIMENSIONAL TOLERANCES (inches): UP-100 : ±0.2 100-100 : ±0.35 150-300 : ±0.3 200-250 : ±0.25	Holes: ±0.05 Angles: ±0.0° (V) : ≤ 30 : ±0.25 >30-100 : ±0.35 >100-300 : ±0.5 ABOVE 300 : ±0.8 X : ±0.2 XX : ±0.2 XXX : ±0.1
SCALE: 1/1 UNIT: MM USED ON: DPS-250AB-24 C	Part No. DPS-250AB-24 C SHEET 1 OF 2 ISSUE DATE: 10/29/07