
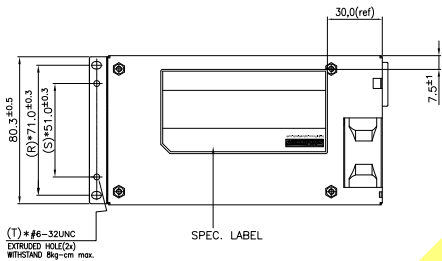

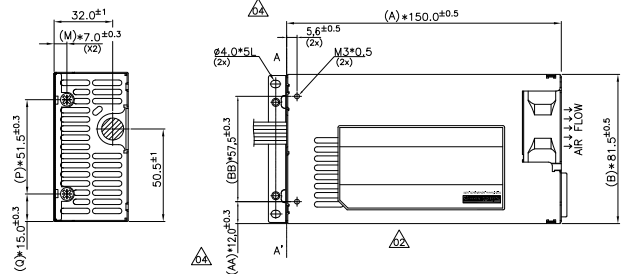




REV.	Description	REV.	Description
01	CABLE CHANGE (客戶要求) 巴志超 11/15'13		
02	(4,E) ADD MORE SPEC. LABEL ON FRONT VIEW. (客戶要求) 巴志超 12/07'13		
03	(12,G) SATA "PF" ROTATION 180DEGREE (客戶要求) 巴志超 01/14'14		
04	(3,D): M3*0.5 WAS M3*5 (3,D): ADD DIM. MARK "AA" & "BB" (OTHERS: CORRECT DRAWING) 巴志超 02/13'14		

DELTA DOC CENTER  
CONFIDENTIAL

 <b>台達電子工業股份有限公司</b> <b>DELTA ELECTRONICS, INC.</b>	Description: PHYSICAL DIMENSIONS OF POWER SUPPLY	
	Part No. PD-350AB-24 A	REV. 04
	USED ON SHEET 2 OF 2	




CONNECTOR	HOUSING	TERMINAL	COVER
P1	Y1Y1 H6657-204MNB+ H6657-220MNB+ JWT C4202H02-A4PA+ C4202H02-A20PA+	Y1Y1 T6656-72F JWT C4202TP-2 WST I4202PS-2 CAROL CL4201TP-2 MOLEX 39-10-0059	
P2	JWT A3963H02-2P CAROL CL3962H00-2P WST P04-I42002 Y1Y1 H6657-204M MOLEX 39-01-2040	JWT C4202TP-2-6-HCS WST I4302K5-2# Y1Y1 4200P-01 MOLEX 44476-111	
P3,PB,PC P4,P5	Y1Y1 H6680-2M JWT C5082H02-4P WST P4-A10202	Y1Y1 T6680-76F JWT C5083TP-2 WST A10219PS-2	
PA,PD	Y1Y1 H6681-004 JWT A2544H00-4P WST P4-I25001	Y1Y1 T6681-7 JWT A2544TP-2 WST I25001PS-2	
PE	Y1Y1 H6672-1B MOLEX 67582-0000 JWT A3811H00-05P-HF WST P5-112707	Y1Y1 T6672-96 MOLEX 47128-1000 JWT A3811TP-000 WST I12707PS-00L	
PF	JWT F6002H50-5P-20 WST P5-I12702T00M Y1Y1 H6671-1B1	JWT F6002CR0 WST P5-I12702CL Y1Y1 C6671-0L	
PG	JWT A2001H02-2P WST P2-I20001	JWT A2001TP-2 WST I20001PS-2	

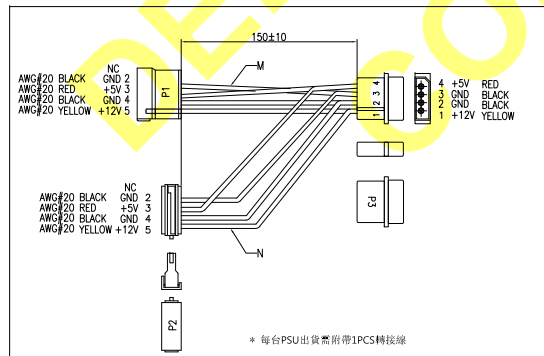

\* 每台PSU出貨需附帶1PCS轉接線

P1(20+4)PIN							
1	ORANGE	+3.3V	AWG#18	13a	ORANGE	+3.3V	AWG#18
2	ORANGE	+3.3V	AWG#18	14	BLUE	-12V	AWG#22
3	BLACK	GND	AWG#20	15	BLACK	GND	AWG#20
4	RED	+5V	AWG#20	16	GREEN	PS-ON	AWG#24
5	BLACK	GND	AWG#20	17	BLACK	GND	AWG#20
6	RED	+5V	AWG#20	18	BLACK	GND	AWG#20
7	BLACK	GND	AWG#20	19	BLACK	GND	AWG#20
8	GRAY	PC	AWG#24	20	NC		
9	PURPLE	+5Vsb	AWG#18	21	RED	+5V	AWG#20
10	YELLOW	+12V1	AWG#18	22	RED	+5V	AWG#20
11	YELLOW	+12V1	AWG#18	23	RED	+5V	AWG#20
12	ORANGE	+3.3V	AWG#18	24	BLACK	GND	AWG#20

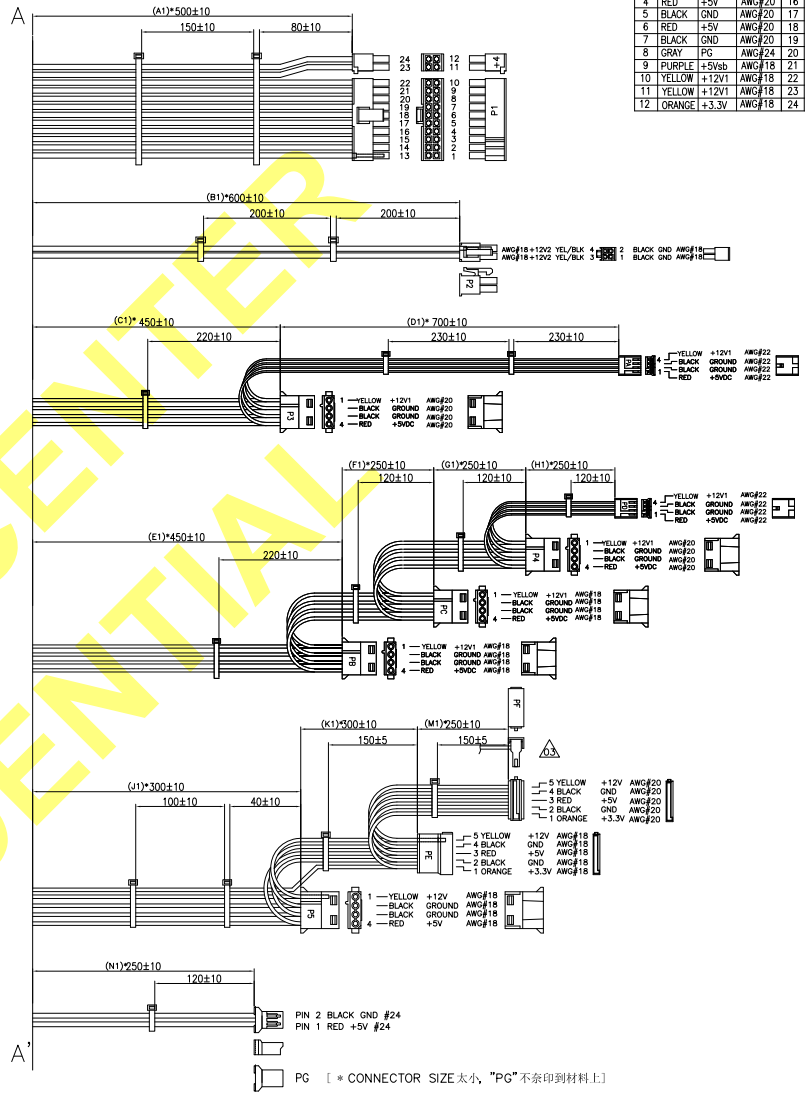

\* IS CRITICAL DIM WHICH MUST BE MEASURED

<b>台達電子工業股份有限公司</b> <b>DELTA ELECTRONICS, INC.</b>	Drawn: 寧仙 11/08'13	Design: 巴志超 11/08'13
	Description: <b>PHYSICAL DIMENSIONS OF POWER SUPPLY</b>	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUS OR DEVICES WITHOUT PERMISSION.	Part No. <b>PD-350AB-24 A</b>	REV. <b>04</b>
DIMENSIONAL TOLERANCES (UNIT: MM) <math>0 \sim 30</math> : ±0.25 DECIMALS UP-100 ±0.2 250-500 ±0.4 UP-600 ±1.5 >30 : ±0.35 X ±0.3 100-150 ±0.25 300-500 ±0.45 800-900 ±1.4 >100-300 ±0.5 X.X : ±0.2 150-200 ±0.3 300-400 ±0.5 800-OVER ±3.1 ABOVE 300 ±0.6 X.XX: ±0.1 200-250 ±0.35	SCALE: UNIT: MM USED ON: <b>DPS-350AB-24 A</b>	
SHEET 1 OF 2		ISSUE DATE: 11/08'13